



ACOUSTICA® THERMAL WHITE BATTS


Acoustica® Thermal White Batts are installed in ceilings, wall cavities and underfloor to provide thermal insulation and acoustic damping. Acoustica® Thermal White Batts are available with or without an aluminium foil facing.

Acoustica® Thermal White Batts are available in a wide range of sizes to suit all stud and joist spacing, with thermal ratings from R0.5 to R3.5 or greater.

The thermally bonded polyester insulation also acts as a sound absorber thus improving the STC rating of the wall, ceiling or floor to which it is installed.

Acoustica® Thermal White Batts retain strength over time and will not sag within the wall cavity. White Batts are non-corrosive, will not rot, decay, be subjected to mould or contain vermin or insects.

Acoustica® Thermal White Batts are simple to install & safe to handle. Thermal White Batts can be either friction-fit or stapled into place. Trimming & fabrication can be done with a sharp knife or electric scissors.

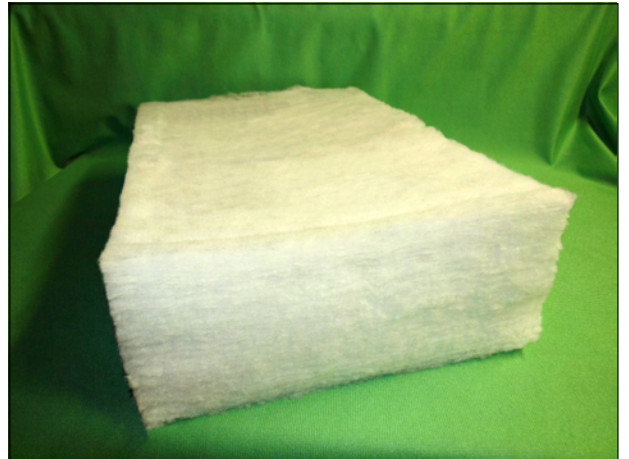

Grd Flr 6A Nelson St
Annandale NSW 2038
Australia

Tel: 1300 722 825
+61 2 9550 2900
Fax: +61 2 9550 5665

info@acoustica.com.au
www.acoustica.com.au

Thermal White Batts

Thermal Insulation

Thermal White Batts conform to the building code of Australia as tested to AS 1530 Part 3,

- Ignitability (0-20) 0
- Spread of Flame (0-10) 0
- Heat Evolved (0-10) 0
- Smoke Developed (0-10) 0-1

Acoustica® Thermal White Batts are completely safe to install. They do not contain fibreglass or formaldehyde and are completely dust free and non-allergenic. White Batts are unaffected by water and have a life span of over 50 years.